


CLAMPING INNOVATION

GDP Pneumatic Pin Clamp

Reliable clamping on variable surfaces and thickness with superior contamination protection

Hook Pin in Closed/Clamped Position

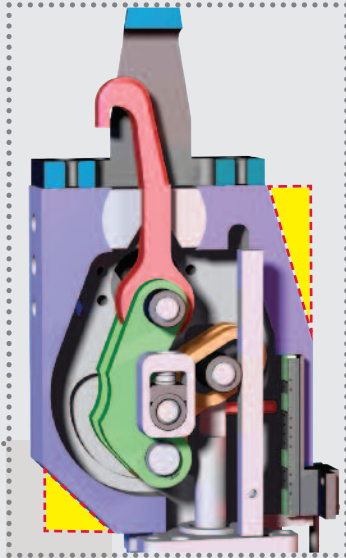



Open pin allows contaminants to exit

Mechanism protected from contaminants

Front face mounting

Full toggling mechanism
Remains locked when air pressure is lost.

Adjustability
Spring-loaded toggle for material thickness variation

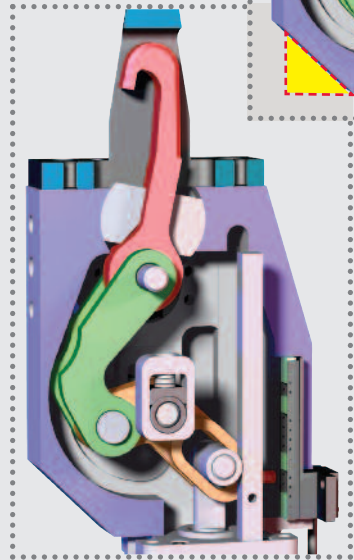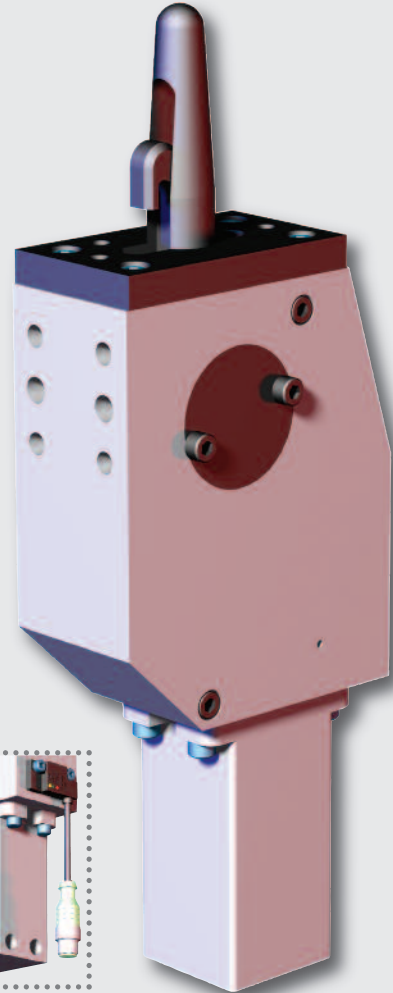


Hook Pin in Open/Unclamped Position

Standard side-mounted sensor with 4-pin connector


Standard 82L-2 cylinder
1/8" NPT or G ports




Three standard centering pins
Hardened tool steel pins have full 360° geometric sheet metal contact.

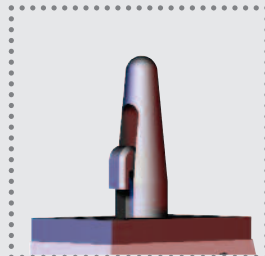

GPD30-520
Ø20.0 - Ø23.0

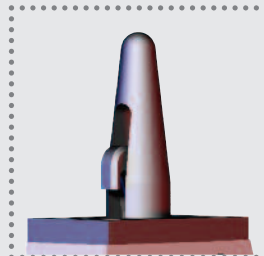

GPD30-525
Ø23.1 - Ø28.0

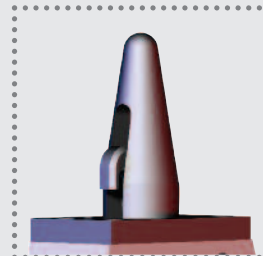

GPD30-530
Ø28.1 - Ø33.0



A DOVER COMPANY



Precisely positioning our customers for productivity.